

MODEL AND SIGNIFICANCE

S	L7N	1500	H	1/2/3/4	125A	PV	1500V
Enterprise code	Design Number	Rated Voltage	High Voltage	Pole	Rated Current	PV system	Rated Operational Voltage


GENERAL PARAMETERS

- Overload protection to avoid more damage to whole system
- Unique mold design have garnered much admiration from many customers
- Aesthetically pleasing design, compact size, lightweight, quick release mechanism, and rail-mounted. The casing and components are made of high-impact resistant and flame-retardant plastic, ensuring excellent and reliable performance.
- High voltage big ampere and small size to save install space and save cost
- Suitable for installation in harsh environments with high temperature and humidity resistance

PRODUCT ADVANTAGES

The SL7N-125D/DH plastic enclosure circuit breaker is a limited current type breaker with overload and short circuit protection, suitable for overload and short circuit protection in DC systems up to 1500V. It is widely used in DC screens, DC distribution cabinets, DC junction boxes, photovoltaic and wind power substations, and communication distribution box protection systems. It can also be used for infrequent on-off switching of circuits under normal conditions.

DIMENSIONS (mm)

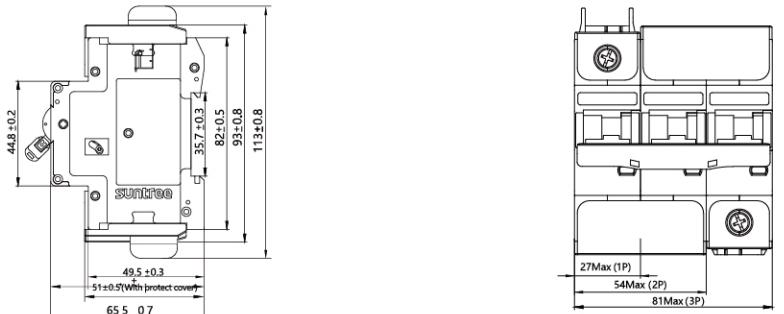

Dc circuit breaker

- SL7N-125D/1P
- SL7N-125D/2P
- SL7N-125D/3P
- SL7N-125D/4P



YEMIN
Yemin SpA +56 9 81297132
www.yemin.cl / info@yemin.cl

ELECTRICAL PARAMETERS

Product Model	SL7N-125D							
	1P	2P	3P	4P	1P	2P	2P	2P
Pole								
Rated Operational Voltage/Ue(V)	DC48~250V/ DC375V/DC440V/ DC600V	DC750V/ DC800V/ DC1000V	DC1200V/ DC1500V	DC1500V	DC48-250V	DC375V/ DC440V/ DC600V	DC750V/ DC800V	DC750V/ DC800V
Rated Operational Current/In(A)	6A, 10A, 16A, 20A, 25A, 32A, 40A, 50A, 63A, 80A					100A, 125A		
Rated Impulse withstand Voltage/Uimp(V)	690V	1250V	1600V		690V	1250V	1600V	
Ultimate Breaking Capacity/Icu(kA)			SL7N-125D 6KA		SL7N-125DH 10KA			
Rated Breaking Capacity/Ics(kA)			SL7N-125D 6KA		SL7N-125DH 10KA			
Max. Impulse Current/Uimp(A)		6KV		8KV		6KV		8KV
Mechanical Life					30000 TIMES			
Electrical Life					1000 TIMES			
Fire-retardant Enclosure Level					V-0			
Ingress Protection					IP40			
Device Width x Height (mm)	93*27*65.5	93*54*65.5	93*81*65.5	93*108*65.5	93*27*65.5	93*54*65.5	93*81*65.5	93*108*65.5
Method of Mounting					35mm din rail install			
Mounting					Easy installed and fastening onto 35mm device rail(DIN)			
Location					Indoor or in the Water-proof Box			
Ambient Temperture					-40°C-85°C			
Altitude					<2000m			
Relative Humidity					+50°C not more than 95%			
Weight(per pole)	0.18kg	0.36kg	0.54kg	0.72kg	0.18kg	0.36kg	0.54kg	0.72kg
Pollution Level					2			
Installation Class					II class or III class			

INSTALLATION PRECAUTIONS

- In a medium without explosion risk and free of gases and dust(including conductive dust) sufficient to corrode metal and destroy insulation
- In the condition with no snow erosion
- It can be installed horizontally and vertically
- The magnetic field of the installation position shall not exceed 5 times the geomagnetic field in any direction;
- It should not be installed in flammable and explosive places
- There should be no significant impact and vibration at the installation place